


HC 50

Hydraulic Drifter

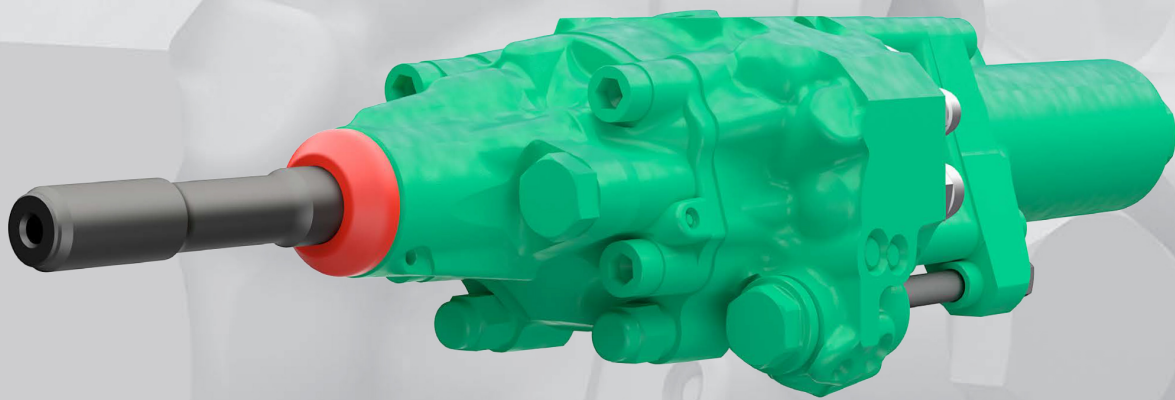

- Strong reputation in drilling industry with proven technology
- Easy to adapt on any machine
- Ready for any job

Highly versatile

- Multiple configurations available for all applications
- Compatible with all standard diameters for bolting and face drilling
- Incorporates similar technologies as larger size drifters

Trouble-free

- Proven reliability and longer lifespan
- 35 years of continuous research, development and improvements

Multiple customizations

- Piston design can be adapted to ground typology and/or hydraulic oil supply
- Choose from a wide selection of front head material and shapes
- Wide rotation torque and rpm setup range

Weight and dimensions

Weight	103 kg
Overall length without shank	826 mm
Overall length with shank	996 - 1,007 mm
Overall width	314 mm
Height	164.5 mm
Height above shank axis	75.5 mm

Impact rating

Maximum output	12 - 14 kW
Input range	21 - 23 kW
Percussion flow range (max)	90 - 105 l/min
Percussion pressure range (max)	130 - 150 bar
Maximum impact frequency (max)	3,300 - 4,200 bpm
Maximum impact energy (max)	180 - 220 J

Other versions are available; please contact the drilling technical support team for more information.


Rotation specs

	31cc	43cc	55cc	67cc
Maximum rotation speed (RPM)	235	209	193	237
Oil flow (l/min)	25	30	35	52
Maximum pressure (bar)	140	140	140	140
Maximum torque (Nm)	230	305	385	466

Flushing flow and pressure

Water flushing	30 - 60 l/min
Front end lubricating air consumption at 3bar	300 l/min

Penetration rate

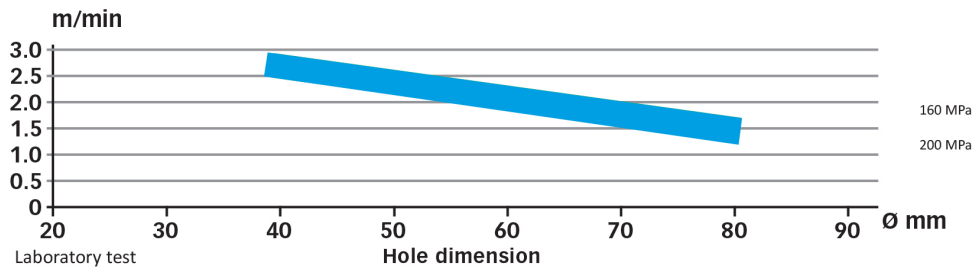

Shank adapters

	CPN
D45 H25 F	86761533
D45 R32 F	86638087
D38 R32 M	86619400
D38 R38 M	86619558
D38 T38 M	86619566

Overhaul kits

Seal kit	CPN depending on configuration
400 impact hours kit	CPN depending on configuration
800 impact hours kit	CPN depending on configuration
1,600 impact hours kit	CPN depending on configuration
3,200 impact hours kit	CPN depending on configuration