


SANDVIK HL1060T

TECHNICAL SPECIFICATION

Sandvik HL1060T hydraulic rock drill is designed for surface longhole drilling of 89 - 152 mm diameter holes. Sandvik HL1060T is a standard rock drill for example in Pantera and DP1100i surface drill rigs.

Sandvik HL1060T is a heavy hydraulic percussive rock drill with independent rotation and separate flushing which ensures high reliability. Sandvik HL1060T is equipped with hydraulic actuator ("Stabilizer") to control contact between drill bit and rock. This ensures optimal drilling performance with high drill steel life time. Different rock drill versions are realized through various optional modules: flushing device for tubes, T51 rods, 60 mm rods and Power Extractor for tubes and rods plus alternative rotation motor displacements. The design is covered by several patents.

TECHNICAL DATA	
Hole diameter	89 - 127 mm (with rods) 89 - 152 mm (with tube rods)
Power class	25 kW
Percussion rate	33 - 38 Hz
Operating pressure	
Percussion	90 - 160 bar
Rotation (max.)	160 bar
Rotation motor type	OMT 400, OMT 500
Drill steels	T51, ST58, GT60, ST68
Shanks	
Ø65 mm rods	T51 / ST58 / GT60 - 760
Ø80 mm rods	GT60 - 760
Ø80 mm rods	ST68 - 630
Ø80 mm rods	ST58 / ST68 - 635
Weight	470 kg

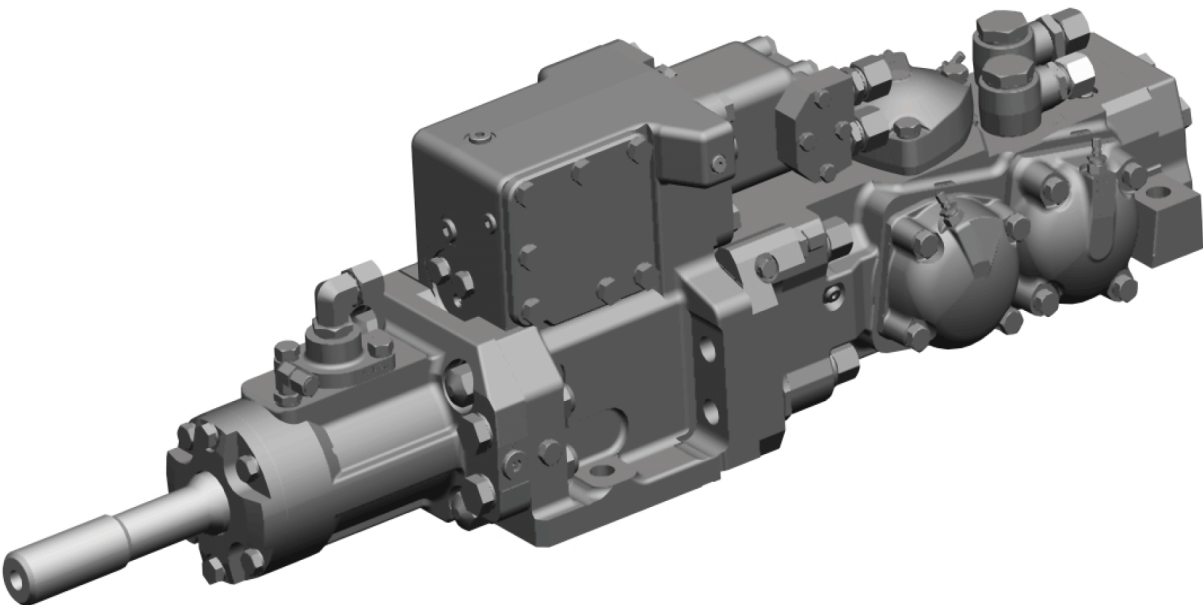

ROTATION MECHANISM

Motor	Orbit type
Motor type 1	OMT 400
Torque (at 180 bar)	2 005 Nm
Rotation speed	0 - 100 rpm
Flow (at max. speed)	85 l/min

ROTATION MECHANISM

Motor	Orbit type
Motor type 2	OMT 500
Torque (at 170 bar)	2 265 Nm
Rotation speed	0 - 100 rpm
Flow (at max. speed)	113 l/min

FLUSHING PRESSURE

Max. pressure (air / water)	20 bar
-----------------------------	--------

ACTUATOR FOR DRILL STEEL CONTROL (STABILIZER)

	Hydraulic actuator for position control of shank adapter in rock drill, control force adjustable through pressure
Torque (at 170 bar)	
Operating pressure	60 - 110 bar, adjustable

ACCUMULATORS

Accumulator gas	Nitrogen N2
High pressure (HP)	50 bar
Low pressure (LP)	4 bar
Stabilizer	40 bar
Filling valve	Vg8 DIN7756

SHANK LUBRICATION



Air flow (at 6 bar)	300 - 400 l/min
Pressure	4 - 7 bar
Oil consumption	600 - 1 200 g/h

OIL RECOMMENDATION

Oil operating temperature	+40°C up to +60°C
Oil recommendation	See Sandvik drill rigs lubricant recommendation for detailed information

OPTION

Special tools for HL1560T Complete set	ID 550 387 95
Special tools for HL1560T Field tool set	ID 550 420 18
Power extractor	See separate specification

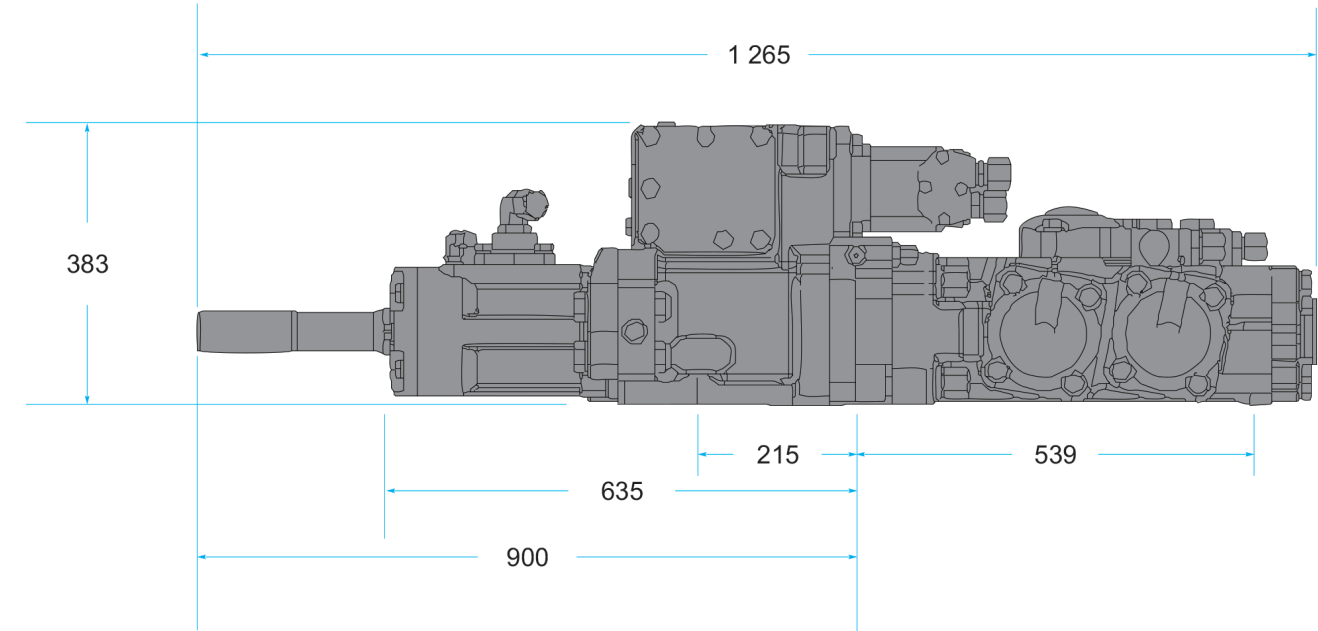

© Delkom A.Ş. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without prior written permission from Delkom A.Ş.

DELKOM A.Ş.

DELKOM A.Ş.

DELKOM A.Ş.